


2-Electrode Gas Discharge Tubes

5KA



1: Dimension(mm)

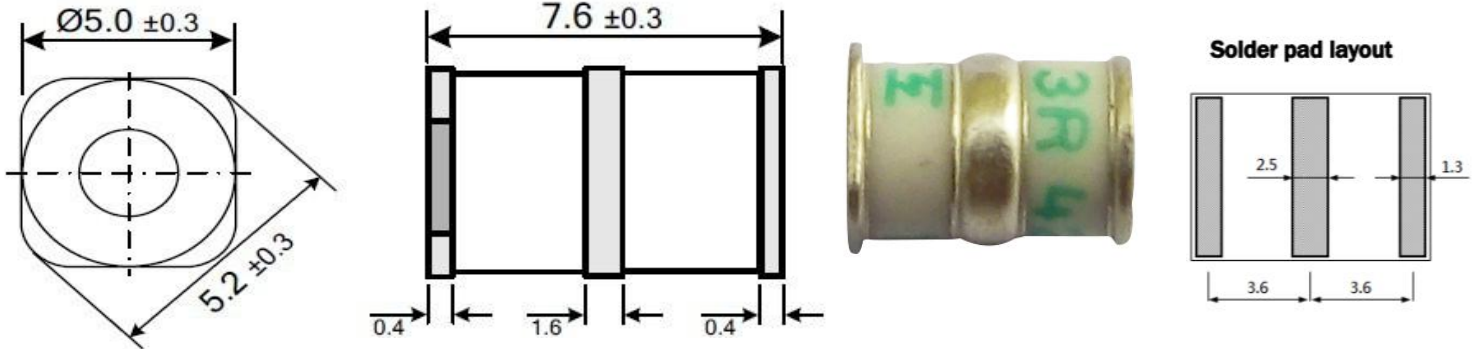

2: Main Applications

- PCI Cards protection
- Telephone/Fax/Modem protection
- single line protection
- ADSL/XDSL Splitter, Power Supply
- Surge Protection Device/Surge Protector

3: Features

- 100% Lead-Free (RoHS Compliant)
- Non-Radioactive
- Low capacitance ($\leq 1\text{pF}$)
- Small size : $\text{Ø}5\text{x}7.6\text{(mm)}$
- Safety certification: File number: E505240

4 Electrical Characteristics

Part Number	DC Spark-over Voltage@ 100V/S	Impulse Spark-over Voltage @100V/ μs	Impulse Spark-over Voltage @1KV/ μs	Insulation Resistance	Impulse discharge current(8/20 μs)	AC discharge current (50Hz, 1s, 10times)	Capacitance (1MHz)	UL Certificate
	V	V	V	G Ω	10 Times	A	PF	UL File number
HA3R5-75SMD	75 $\pm 20\%$	<450	<550	>1	5KA	5	≤ 1	E505240
HA3R5-90SMD	90 $\pm 20\%$	<450	<550	>1	5KA	5	≤ 1	E505240
HA3R5-150SMD	150 $\pm 20\%$	<500	<600	>1	5KA	5	≤ 1	E505240
HA3R5-200SMD	200 $\pm 20\%$	<500	<600	>1	5KA	5	≤ 1	E505240
HA3R5-230SMD	230 $\pm 20\%$	<600	<700	>1	5KA	5	≤ 1	E505240
HA3R5-250SMD	250 $\pm 20\%$	<600	<700	>1	5KA	5	≤ 1	E505240
HA3R5-300SMD	300 $\pm 20\%$	<600	<700	>1	5KA	5	≤ 1	E505240
HA3R5-350SMD	350 $\pm 20\%$	<900	≤ 1000	>1	5KA	5	≤ 1	E505240
HA3R5-400SMD	400 $\pm 20\%$	<900	≤ 1000	>1	5KA	5	≤ 1	E505240
HA3R5-420SMD	420 $\pm 20\%$	<900	≤ 1000	>1	5KA	5	≤ 1	E505240
HA3R5-470SMD	470 $\pm 20\%$	<1050	≤ 1150	>1	5KA	5	≤ 1	E505240
HA3R5-600SMD	600 $\pm 20\%$	<1200	≤ 1300	>1	5KA	5	≤ 1	E505240

Packing Quantity : 1000PCS

Specifications are subject to change without notice

sales@huaandz.com