


High Impulse Current Gas Discharge Tubes

20KA / 40KA



1: Dimension(mm)

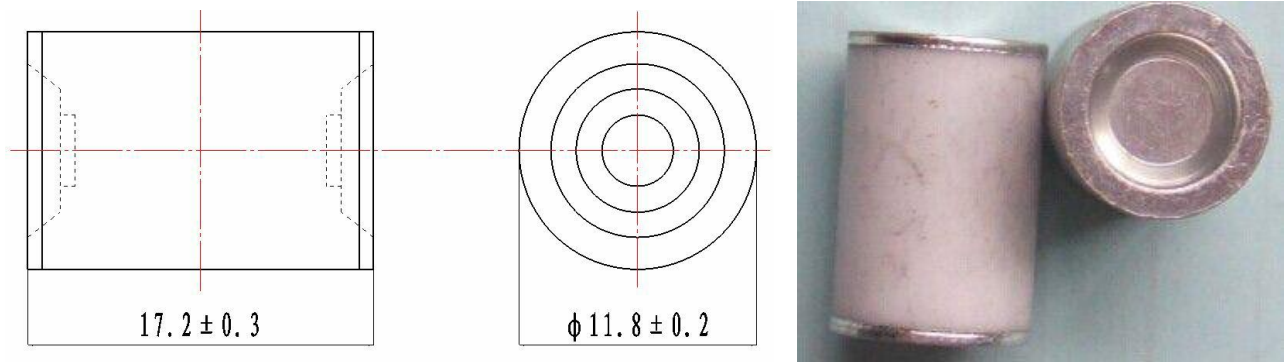

Specification of H2R12-600V

Nominal Dc spark-over voltage (100V/s)	480V-720V	
impulse spark-over voltage 5KV/μs (1.2/50us, 6KV)	<1500V	
Nominal impulse discharge current 8/20μs 10 times	20KA	
Maximum nominal impulse discharge current 8/20μs 1times	40KA	
TOV behaviour (1200V 1 operation 50HZ 200ms)	<300A	
Follow current behaviour 50/60HZ 260V	100A	
Maximum capacitance (1MHz)	<1.5pF	
Minimum insulation resistance@ 100V	10000MΩ	
Weight	~ 8g	
Operation and storage temperature	-40°C ...+90°C	
Marking, green	2R 600 15	600 - Nominal voltage 15 - Year of production

Specifications are subject to change without notice



sales@huaandz.com

High Impulse Current Gas Discharge Tubes

20KA / 40KA



1: Dimension(mm)

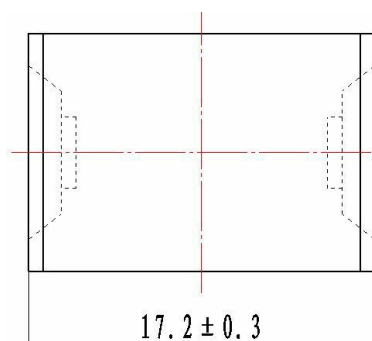

Specification of H2R12-800V

Nominal Dc spark-over voltage (100V/s)	>600V		
impulse spark-over voltage 5KV/μs (1.2/50us, 6KV)	1500V		
Nominal impulse discharge current 8/20μs 10 times	20KA		
Maximum nominal impulse discharge current 8/20μs 1times	40KA		
Follow current behaviour 50/60HZ 260V	100A		
Maximum capacitance (1MHz)	<3pF		
Minimum insulation resistance@ 250V	10000MΩ		
Weight	~ 8g		
Operation and storage temperature	-40℃ ...+90℃		
Marking, blue	<table border="1"> <tbody> <tr> <td>2R 800 15</td> <td>800 - Nominal voltage 15 - Year of production</td> </tr> </tbody> </table>	2R 800 15	800 - Nominal voltage 15 - Year of production
2R 800 15	800 - Nominal voltage 15 - Year of production		

Specifications are subject to change without notice

sales@huaandz.com