


High Impulse Current Gas Discharge Tubes

25KA



1: Dimension(mm)

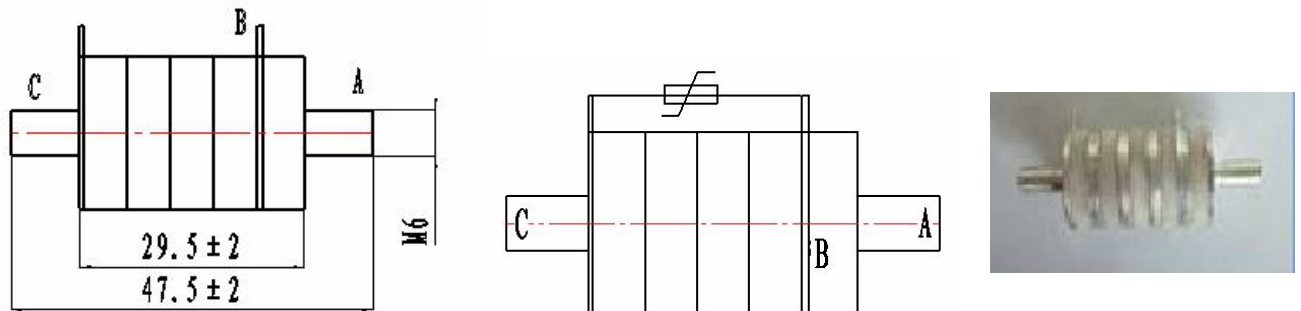

Specification of H6R20-600L

Nominal Dc spark-over voltage (100V/s)	A-B >450V	
	A-C >600V	
Maximum impulse spark-over voltage (1.2/50us)	A-B <1200V	
	A-C +MOV<1500V	
Nominal impulse discharge current 8/20µs	25KA	
Maximum impulse discharge current 10/350µs	25KA	
Maximum continuous operating voltage (50-60HZ AC)	255V	
Voltage Protection Level	<2000V	
Response time	50ns	
Insulation resistanc	1GΩ	
Etymology of electricity	12.5As	
Operation and storage temperature	-40℃ ...+90℃	
Marking	600 15	600 - Nominal voltage 15 - Year of production

Specifications are subject to change without notice

sales@huaandz.com