

## Transient Voltage Suppressors

TVS Diodes - 600W > P6SMB Series



### Description

The P6SMB series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events.

### Features

- For surface mounted applications in order to optimize board space
- Reliable low cost construction utilizing molded plastic technique
- Plastic material has UL flammability classification 94V-O
- Typical IR less than 1uA above 10V
- Fast response time: typically less than 1.0ps from 0 Volts to VBR min
- Low inductance
- High Temperature soldering: 260°C/10 seconds at terminals



Package: DO-214AA / SMB

### Applications

- I/O interface
- AC/DC power supply
- Low frequency signal transmission line (RS232, RS485, etc.)

### Electrical Characteristics

Parameter	Symbol	Value	Unit
Peak Pulse Power Dissipation at TA=25°C by 10x1000µs waveform (Fig.1)(Note 1), (Note 2)	P <sub>PPM</sub>	600	W
Peak pulse current of at 10/1000µs waveform (Note 1, Fig.3)	I <sub>PPM</sub>	See Table	Amps
Steady state power dissipation at TA=50°C (Fig.5)	P <sub>M(AV)</sub>	5.0	Watts
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load, (JEDEC Method) (Note3, Fig.6)	I <sub>FSM</sub>	100	Amps
Operating junction and Storage Temperature Range.	T <sub>J</sub> , T <sub>STG</sub>	-65 to +150	°C
Typical thermal resistance junction to lead	R <sub>θJL</sub>	20	°C/W
Typical thermal resistance junction to ambient	R <sub>θJA</sub>	100	°C/W

- Notes:
1. Non-repetitive current pulse, per Fig.3 and derated above TA=25°C per Fig.2.
  2. Mounted on 5.0mm×5.0mm (0.03mm thick) copper pads to each terminal.
  3. 8.3ms single half sine-wave, or equivalent square wave, duty cycle=4 pulses per minutes maximum.

Electrical Characteristics (TA=25°C)

Part Number		marking code		Reverse Stand-Off Voltage	Breakdown Voltage V <sub>BR</sub> (Volts)@I <sub>T</sub>		Test Current t	Maximum Clamping Voltage @I <sub>PP</sub>	Peak Pulse Current	Reverse Leakage @V <sub>RWM</sub>
Unidirectional	Bidirectional	Uni	Bi	V <sub>RWM</sub> (V)	Min	Max	I <sub>T</sub> (mA)	V <sub>C</sub> (V)	I <sub>PP</sub> (A)	I <sub>R</sub> (μA)
P6SMB6.8A	P6SMB6.8CA	6V8A	6V8C	5.80	6.45	7.14	10	10.5	57.1	1000
P6SMB7.5A	P6SMB7.5CA	7V5A	7V5A	6.40	7.13	7.88	10	11.3	53.1	500
P6SMB8.2A	P6SMB8.2CA	8V2A	8V2A	7.02	7.79	8.61	10	12.1	49.6	200
P6SMB9.1A	P6SMB9.1CA	9V1A	9V1A	7.78	8.65	9.55	1.0	13.4	44.8	50
P6SMB10A	P6SMB10CA	10A	10C	8.55	9.50	10.5	1.0	14.5	41.4	10
P6SMB11A	P6SMB11CA	11A	11C	9.40	10.5	11.6	1.0	15.6	38.5	5.0
P6SMB12A	P6SMB12CA	12A	12C	10.2	11.4	12.6	1.0	16.7	35.9	5.0
P6SMB13A	P6SMB13CA	13A	13C	11.1	12.4	13.7	1.0	18.2	33.0	5.0
P6SMB15A	P6SMB15CA	15A	15C	12.8	14.3	15.8	1.0	21.2	28.3	1.0
P6SMB16A	P6SMB16CA	16A	16C	13.6	15.2	16.8	1.0	22.5	26.7	1.0
P6SMB18A	P6SMB18CA	18A	18C	15.3	17.1	18.9	1.0	25.2	23.8	1.0
P6SMB20A	P6SMB20CA	20A	20C	17.1	19.0	21.0	1.0	27.7	21.7	1.0
P6SMB22A	P6SMB22CA	22A	22C	18.8	20.9	23.1	1.0	30.6	19.6	1.0
P6SMB24A	P6SMB24CA	24A	24C	20.5	22.8	25.2	1.0	33.2	18.1	1.0
P6SMB27A	P6SMB27CA	27A	27C	23.1	25.7	28.4	1.0	37.5	16.0	1.0
P6SMB30A	P6SMB30CA	30A	30C	25.6	28.5	31.5	1.0	41.4	14.5	1.0
P6SMB33A	P6SMB33CA	33A	33C	28.2	31.4	34.7	1.0	45.7	13.1	1.0
P6SMB36A	P6SMB36CA	36A	36C	30.8	34.2	37.8	1.0	49.9	12.0	1.0
P6SMB39A	P6SMB39CA	39A	39C	33.3	37.1	41.0	1.0	53.9	11.1	1.0
P6SMB43A	P6SMB43CA	43A	43C	36.8	40.9	45.2	1.0	59.3	10.1	1.0
P6SMB47A	P6SMB47CA	47A	47C	40.2	44.7	49.4	1.0	64.8	9.3	1.0
P6SMB51A	P6SMB51CA	51A	51C	43.6	48.5	53.6	1.0	70.1	8.6	1.0
P6SMB56A	P6SMB56CA	56A	56C	47.8	53.2	58.8	1.0	77.0	7.8	1.0
P6SMB62A	P6SMB62CA	62A	62C	53.0	58.9	65.1	1.0	85.0	7.1	1.0

Electrical Characteristics (TA=25°C)


continued

Part Number		marking code		Reverse Stand-Off Voltage	Breakdown Voltage V <sub>BR</sub> (Volts)@I <sub>T</sub>		Test Current	Maximum Clamping Voltage@I <sub>PP</sub>	Peak Pulse Current	Reverse Leakage @V <sub>RWM</sub>
Unidirectional	Bidirectional	Uni	Bi	V <sub>RWM</sub> (V)	Min	Max	I <sub>T</sub> (mA)	V <sub>C</sub> (V)	I <sub>PP</sub> (A)	I <sub>R</sub> (μA)
P6SMB68A	P6SMB68CA	68A	68C	58.1	64.6	71.4	10	92.0	6.5	1.0
P6SMB75A	P6SMB75CA	75A	75C	64.1	71.3	78.8	10	103	5.8	1.0
P6SMB82A	P6SMB82CA	82A	82C	70.1	77.9	86.1	10	113	5.3	1.0
P6SMB91A	P6SMB91CA	91A	91C	77.8	86.5	95.5	1.0	125	4.8	1.0
P6SMB100A	P6SMB100CA	100A	100C	85.5	95.0	105	1.0	137	4.4	1.0
P6SMB110A	P6SMB110CA	110A	110C	94.0	105	116	1.0	152	3.9	1.0
P6SMB120A	P6SMB120CA	120A	120C	102	114	126	1.0	165	3.6	1.0
P6SMB130A	P6SMB130CA	130A	130C	111	124	137	1.0	179	3.4	1.0
P6SMB150A	P6SMB150CA	150A	150C	128	143	158	1.0	207	2.9	1.0
P6SMB160A	P6SMB160CA	160A	160C	136	152	168	1.0	219	2.7	1.0
P6SMB170A	P6SMB170CA	170A	170C	145	162	179	1.0	234	2.6	1.0
P6SMB180A	P6SMB180CA	180A	180C	154	171	189	1.0	246	2.4	1.0
P6SMB200A	P6SMB200CA	200A	200C	171	190	210	1.0	274	2.2	1.0
P6SMB220A	P6SMB220CA	220A	220C	185	209	231	1.0	328	1.8	1.0
P6SMB250A	P6SMB250CA	250A	250C	214	237	263	1.0	344	1.74	1.0
P6SMB300A	P6SMB300CA	300A	300C	256	285	315	1.0	414	1.45	1.0
P6SMB350A	P6SMB350CA	350A	350C	300	333	368	1.0	482	1.24	1.0
P6SMB400A	P6SMB400CA	400A	400C	342	380	420	1.0	548	1.10	1.0
P6SMB440A	P6SMB440CA	440A	440C	376	418	462	1.0	602	1.00	1.0
P6SMB480A	P6SMB480CA	480A	480C	408	456	504	1.0	658	0.91	1.0
P6SMB510A	P6SMB510CA	510A	510C	434	485	535	1.0	698	0.86	1.0
P6SMB540A	P6SMB540CA	540A	540C	459	513	567	1.0	740	0.81	1.0


Notes:For bidirectional type having V<sub>RWM</sub> of 10 volts and less, the I<sub>R</sub> limit is double.

## Description of Part Number


P6SMB XXX C A

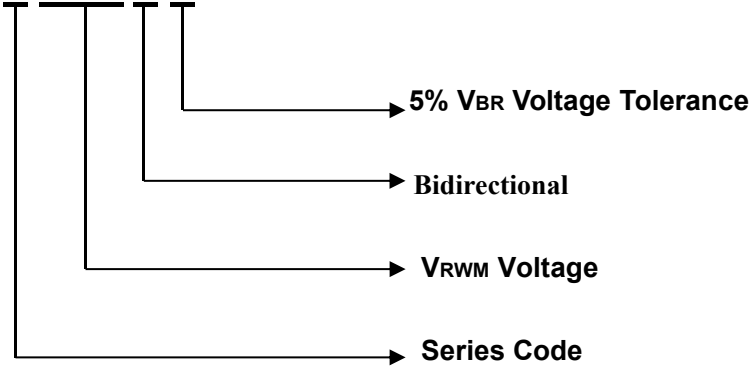

## Packing Options

Package Type	Description	Packing Quantity	Industry Standard
 DO-214AA	Embossed Carrier Reel Pack	750 PCS / 3000PCS	EIA-481-1

## Dimensions - DO-214AA/ SMB

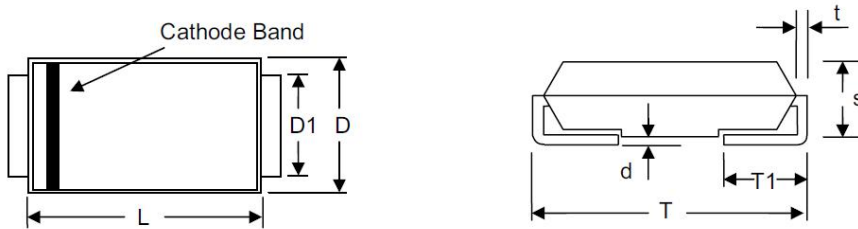

SMB/DO-214AA

Item	Millimeters		Inches	
	Min.	Max.	Min.	Max.
L	4.06	4.57	0.160	0.180
D	3.30	3.94	0.130	0.155
D1	1.95	2.20	0.077	0.086
T	5.21	5.59	0.205	0.220
T1	0.76	1.52	0.030	0.060
d	-	0.203	-	0.008
s	2.13	2.47	0.084	0.097
t	0.152	0.305	0.006	0.012

## Ratings and Characteristics Curve

Figure 1. Peak Pulse Power Rating Curve

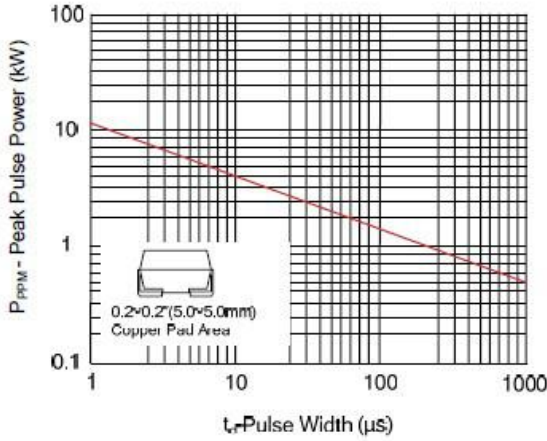


Figure 2. Pulse Derating Curve

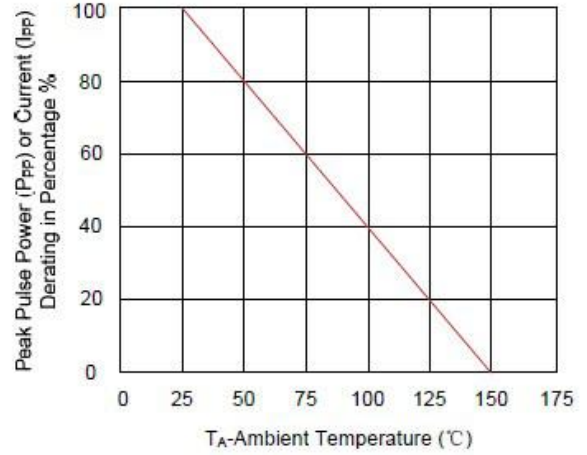


Figure 3. Pulse Waveform

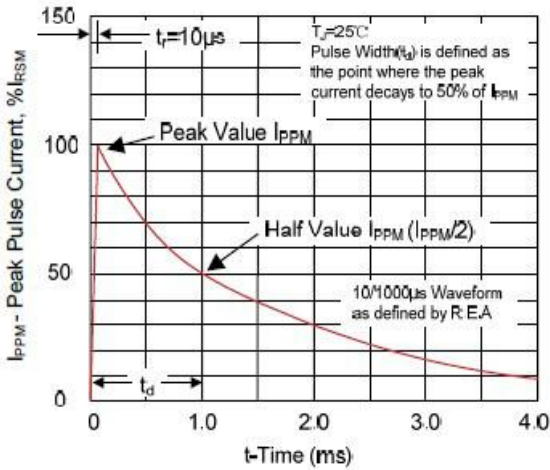


Figure 4. Typical Junction Capacitance

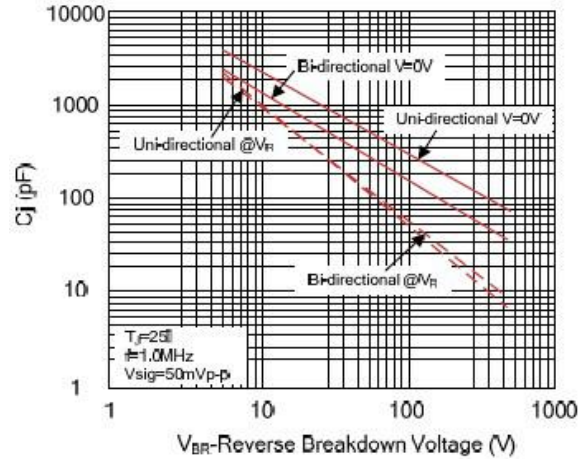


Figure 5. Steady State Power Dissipation Derating Curve


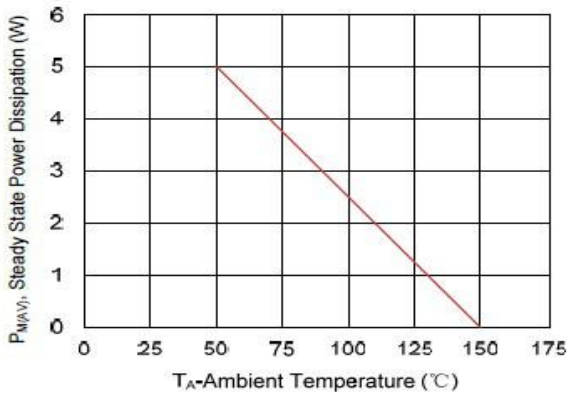


Figure 6. Maximum Non-Repetitive Forward Surge Current Uni-Directional Only

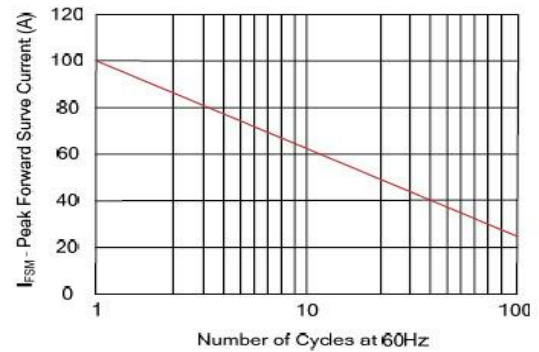

[sales@huaandz.com](mailto:sales@huaandz.com)