


▼ Coaxial Solution:

Surge level: 8/20 μ s CM/DM 20KA

Application product:

Surge protection Device

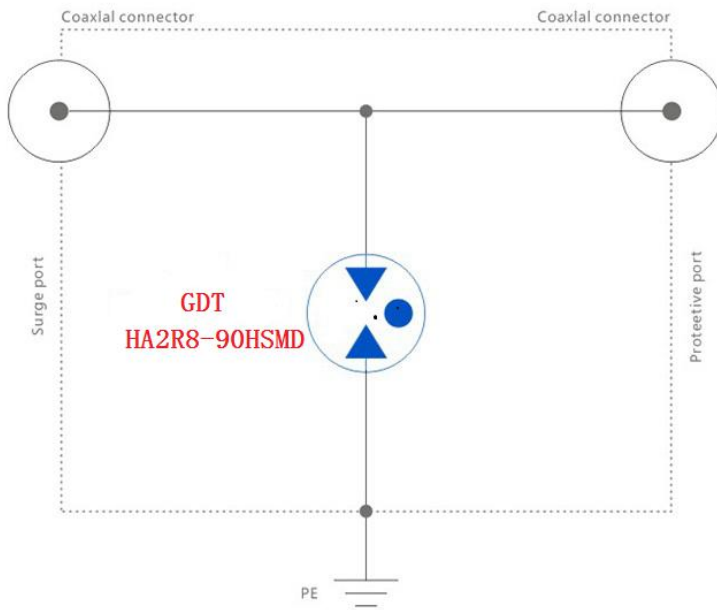

Specification.....

Part Number	DC Spark-over Voltage @ 100V/S	Insulation Resistance	Impulse discharge current(8/20 μ s)	AC discharge current (50Hz,1s,10time s)	Capacitance (1MHz)	Size	UL file number
GDT	V	G Ω	10 Times	A	PF	mm	√
HA2R8-90HSMD	90V \pm 20%	>1	20KA	20	\leq 1	Φ 8*6mm	E505240

We focus on development, production,distribution of GDT,TSS.MOV,TVS,ESD,PTC component,We have laboratories of EMC,aiming to provide total turnkey service of surge/ESD test and circuit PCB improvement.

sales@huaandz.com