


## ▼RJ45 Solution:

Surge level: 8/20μs CM/DM 2KA

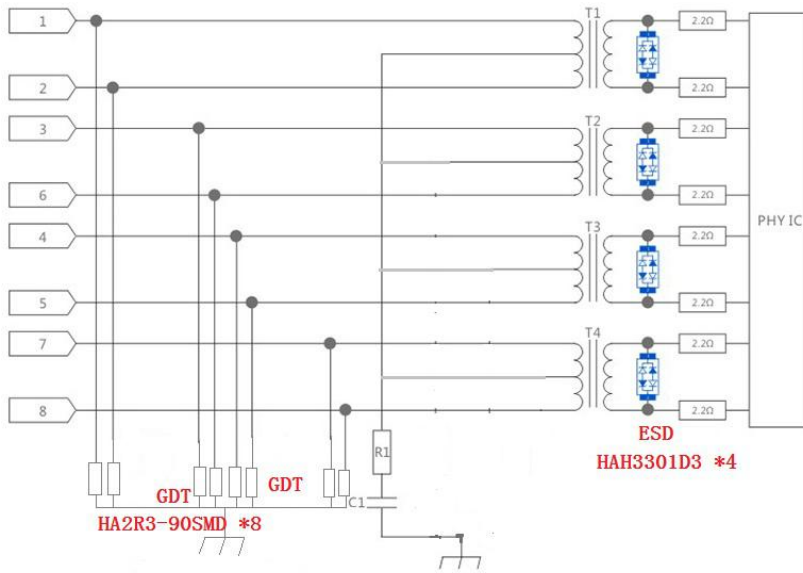

## Specification.....

Part Number	VRWM	VBR	Co Typical value	Vc @1A	Ppp 8/20us	Package	ESD Air / Contact
ESD TVS	V	V	pF	V max	W		
<b>HAH3301D3</b>	<b>3.3</b>	<b>4</b>	<b>1</b>	<b>7.0</b>	<b>350</b>	<b>SOD-323</b>	<b>±8kV / ±15kV</b>

We focus on development, production, distribution of GDT, TSS.MOV, TVS, ESD, PTC component. We have laboratories of EMC, aiming to

Part Number	DC Spark-over Voltage@ 100V/S	Impulse Spark -over Voltage @1KV/μs	Insulation Resistanc e	Impulse discharge current(8/20μs)	AC discharge current (50Hz, 1s, 10times)	Capacit ance (1MHz)	UL file number
GDT	V	V	GΩ	10 Times	A	PF	√
<b>HA2R3-90SMD</b>	<b>90±20%</b>	<b>≤ 1000</b>	<b>&gt;1</b>	<b>2KA</b>	<b>2</b>	<b>≤1</b>	<b>E505240</b>

provide total turnkey service of surge/ESD test and circuit PCB improvement.

[sales@huaandz.com](mailto:sales@huaandz.com)